


TECHNICAL INFORMATIONS

BRIL XL

42W 4000K


Downlight dimável com design elegante e alta proteção.
 Downlight dimmable with stylish design and high protection.
 Downlight regulable con diseño elegante y alta protección.

ILAR-01843

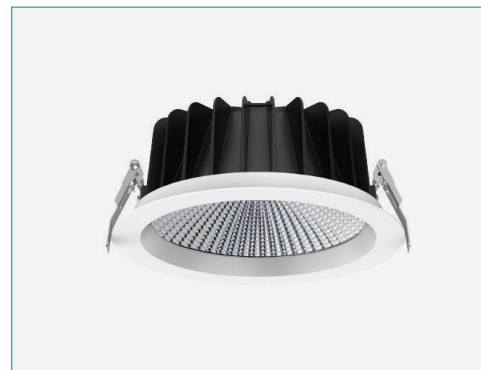

| REFERENCE | | DIMENSION & WEIGHT | | PHOTOMETRICAL DATA | |
|------------------------------------|----------------|--|-------------|------------------------|---------|
| LED Type | LED COB | Dimension (A) | 225mm | Total Luminous Flux | 4620lm |
| Mounting Type | Recessed | Dimension (B) | 87mm | Luminous Efficacy | 110lm/w |
| Body Material | Aluminium | Dimension (C) | 181mm | Beam Angle | 60° |
| Housing Colour | White RAL9016 | Dimension (D) | 193,5mm | Colour Temperature | 4000K |
| Body Shape | Round | Cutout | Ø200-Ø210mm | Colour Rendering Index | ≥80 |
| Nominal Lifetime (EOL end of life) | 75000H | Net Weight | 0,96kg | | |
| Dimmable | YES | Gross Weight | 1,13kg | | |
| Dimming Options | NODIM | | | | |
| ELECTRICAL AND OPERATING DATA | | ENERGY LABEL & STANDARS | | CERTIFICATIONS | |
| Nominal Wattage | 42W | Energy Label | - | CE | YES |
| Nominal Voltage | 220-240V | Energy Consumption KWH/1000H | - | Warranty | 3 YEARS |
| Operating Frequency | 50/60Hz | Type of Protection | IP54 | | |
| Power Factor | ≥0.9 | Protection Class | Class II | | |
| Operating Temperature | -20°C to +45°C | Protection Class IK (shock resistance) | IK03 | | |
| Starting Time 100% ON | 0.0001s | | | | |
| ON/OFF Cycles | 100.000 | | | | |

SIZE

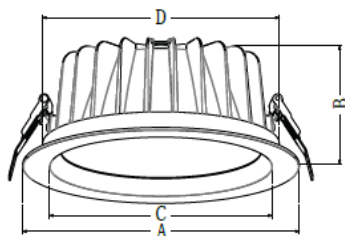

Designed by Aronlight in Portugal. Made in PRC

