

TECHNICAL INFORMATIONS

LIGADOR FLEX 3D

Conector Rápido de Instalação.

Quick Install Connector.

Conector de Instalación Rápida

ILAR-00895



REFERENCE


IEC:
Voltage/Curent 450V / 32A
Wire Size 0.2-4.0mm² CU
Quantity 50 units per box

UL:
Voltage/Curent 300V / 20A
Wire Size 24-12 AWG
Power-frequency withstand voltage AC2500V
Impulse withstand voltage 3000V
Contact Resistance ≤15mΩ
Insulation Resistance ≥DC500V, 500MΩ
Working Temperature -40°C ~ +105°C
Stripping length 14MM

SIZE

Width 18.6mm
Length 19.40mm
Height 9.6mm
Width 18mm
Width 11.2mm

INSTALLATION

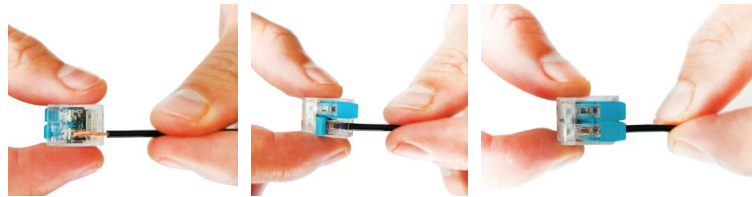

Fio descarnado até 11mm
Strip conductor to 11mm
Cable conductor de hasta 11mm

Levante a patilha para abrir o ligador e insira o fio condutor.
Lift the lever to open the connector and insert the strip conductor.
Levante la tapa para abrir el conector e inserte el cable conductor.

Por fim, baixe a patilha para fechar o grampo.
Finally, lower the tab to close the clamp.
Finalmente, baje la tapa para cerrar la abrazadera.

TECHNICAL DRAWING

