

## TECHNICAL INFORMATIONS

# LINEAR MODULAR LIGHT

## 40W 4000K

Modular aluminum luminaire with an elegant design.  
Luminária modular de alumínio com design elegante.  
Luminaria modular de aluminio con un diseño elegante.



### ILAR-01806

#### REFERENCE

Reference	ILAR-01806
Mounting Type	Recessed/Surface/Suspended
Body Material	PC+Aluminum
Housing Colour	White
Body Shape	Rectangular
Lifetime (L70B50) at Ta=25°C)	30000H

#### DIMENSION & WEIGHT

Lenght	1200mm
Width	54mm
Height	58mm
Cut-out	-
Packaging Unit	1pc/carton
Weight (g)	1100grs

#### PHOTOMETRICAL DATA

Total Luminous Flux	4800lm
Luminous Efficacy	120lm/w
Beam Angle	120°
Colour Temperature	4000K
Colour Rendering Index	>80
SDCM	<6

#### ELECTRICAL AND OPERATING DATA

Nominal Wattage	40W
Nominal Voltage	170-265V
Operating Frequency	50/60Hz
Power Factor	≥0.9
Operating Temperature	-20°C to +45°C
Starting Time 100% ON	0.5s
Switching Times	10000
Group Connection	MAX. 1000W


#### ENERGY LABEL & STANDARS

Energy Efficiency Rating	F
Type of Protection	IP20
Protection Class	Class II
Protecion Class IK (shock resistance)	IK09


#### CERTIFICATIONS

2014/30/EU (EMC Directive)	YES
2014/35/EU (LVD Directive)	YES
ROHS	YES
Warranty	3 YEARS

#### SIZE

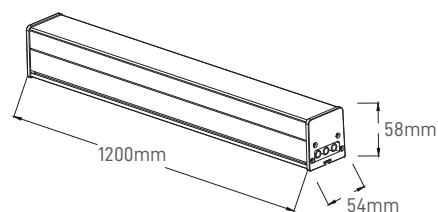

#### RECOMMENDED ACCESSORIES (PURCHASED SEPARATELY)

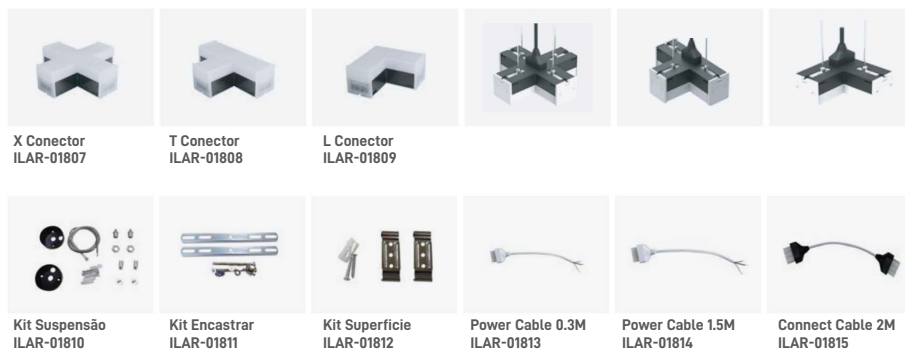

Designed by Aronlight in Portugal. Made in PRC

